


16 - BUSBAR RANGE

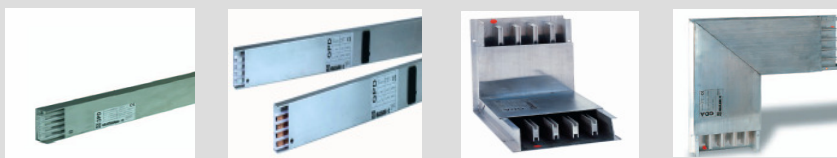

	■ ELS	■ EPD	■ EDA	■ EDR
Nominal current	25 – 40 A	63 – 160 A	160 - 1000 A	250 – 1600 A
Type	Lighting	Distribution	Distribution	Distribution
Operational voltage	230/400 V	500 V	690 V	690 V
Insulation Voltage	750 V	750 V	750 V	750 V
Conductors material	CU	AL/CU	AL	CU
Conductors number	2 - 4 - 6 - 8	4 - 5	4 - 5	4 - 5
Neutral cross section	100%	100%	100%	100%
PE cross section	> 100%	> 100%	> 100%	> 100%
Housing material	AL	AL	AL	AL
Plug in points	YES	YES	YES	YES
Tap off boxes up to	16 A	63 A	400 A	400 A
Max peak Icw for 1s	2 kA (0,1s)	6 kA	37 kA	40 kA
Max peak Icw	4 kA	10 kA	80 kA	81 kA
IP protection degree	55	42/55	50/55	50/55